

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
**WO 2004/040548 A1**

(51) International Patent Classification<sup>7</sup>: **G09G 5/02**

(21) International Application Number:  
PCT/IL2003/000905

(22) International Filing Date:  
2 November 2003 (02.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/422,484 31 October 2002 (31.10.2002) US

(71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CY, CZ, DK, DM, DZ, EC, EE, EG, ES, FI, FR, GB, GD, GE, GH, GM, GR, HR, HU, ID, IE, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,

MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, SZ, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only): **GENOA COLOR TECHNOLOGIES LTD.** [IL/IL]; P. O. Box 12209, 46733 Herzlia (IL).

(71) Applicants and


(72) Inventors (for DE, JP, US only): **BEN-CHORIN**, Moshe [IL/IL]; 34 Ya'kov Street, 76262 Rehovot (IL). **BARUCHI**, Itay [IL/IL]; 29 Dubnov Street, Apt. 12, 64957 Tel Aviv (IL).

(74) Agents: **EITAN, PEARL, LATZER & COHEN-ZEDEK** et al.; 2 Gav Yam Center, 7 Shenkar Street, 46725 Herzlia (IL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,

[Continued on next page]

(54) Title: SYSTEM AND METHOD OF SELECTIVE ADJUSTMENT OF A COLOR DISPLAY

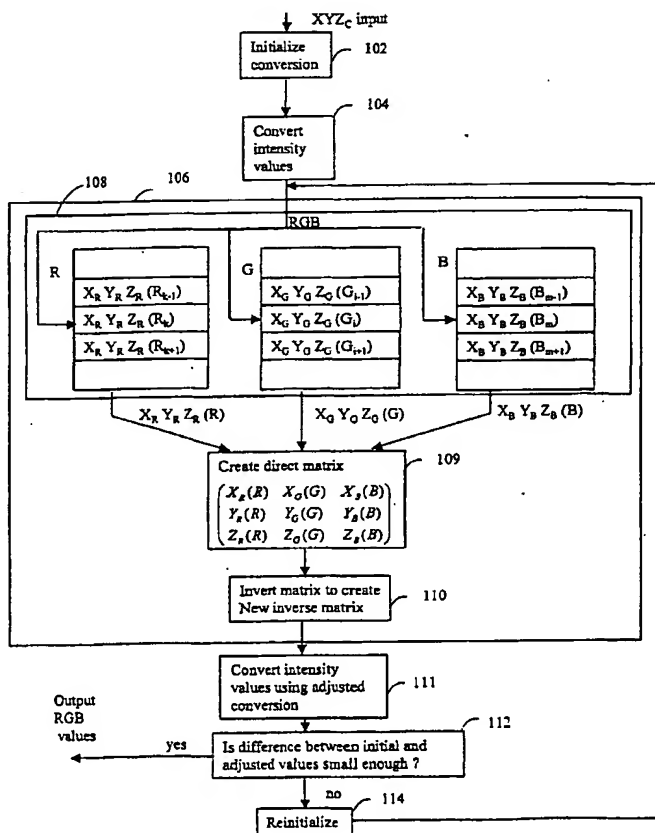

(57) Abstract: Some embodiments of the invention provide a method a device and/or a system for selective color adjustment including adjusting an intensity value of a first primary color component of a pixel based, at least in part, on an intensity value of a second primary color component of the pixel.



MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States (regional):** ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

**SYSTEM AND METHOD OF SELECTIVE ADJUSTMENT OF A COLOR  
DISPLAY**

**Field of the Invention**

5           [001] The invention relates generally to color adjustment of color displays and, more particularly, to selective adjustment of a primary color component of the display.

**Background of the Invention**

10           [002] Liquid Crystal (LC) devices are used in different types of displays, including LC transmission-type displays for direct viewing, typically employed by laptop and desktop computers, cellular telephones, and other mobile devices. In recent years, LC on silicon devices (LCoS) have been developed for use as reflective or transmissive spatial light modulators (SLM's) of projection display devices. Such a projection display device includes an array of LC cells, one or  
15           more cell for each image pixel, wherein each cell modulates the intensity of light passing through or reflected from the cell. The LC cell rotates the polarization of the incident polarized light according to the voltage applied to the cell. The outgoing light passes through an additional polarizing element. Therefore, the ratio between the intensity of outgoing light and that of the incident light is controlled by the rotation of the polarization. Generally, if the two fixed  
20           polarizers are set in perpendicular polarizations and the LC cell does not rotate the polarization of the incoming light, the device is in a "dark" state. Conversely, if the LC cell rotates the polarization by 90 degrees, the device is in a "bright" state. Partial rotation of the polarization yields intermediate tones, i.e., gray  
25           levels. The relation between the applied voltage and the relative intensity obtained from the device, with respect to the bright state, is commonly referred to as the "response function" of the device, or the "gamma" of the device.

30           [003] "Gamma correction" refers to a function applied to a LC device to adjust its tone gradation response. In a typical Gamma correction algorithm, pixel data is converted into new values using a look-up-table. The new values are used to control the voltage applied to the device. Using such look-up-table correction, the gradation response can be adjusted to meet required performance parameters.

[004] In color displays, the light modulated by the SLM is also filtered by appropriate color filters. The combination of colored light and controlled gradation levels for each of a plurality of primary color pixels allows the representation of color images. The mixing of the different primaries may be temporal, as in sequential projection devices; simultaneous, as in three-panel RGB projection devices; or spatial, as in direct view LC display devices. In sequential display systems, a stream of sequential single color sub-frames is temporally integrated by the viewer's eye to obtain a color image. In simultaneous display systems, three RGB sub-images, produced by three separate panels, are viewed simultaneously. In direct view systems, the eye of the viewer integrates the light coming from neighboring sub-pixels of different colors to obtain a full color image.

[005] An underlying assumption in the design of existing LC color displays is that the color of outgoing light may be determined in a straightforward manner by the light source and color filters used. According to this assumption, the chromaticity of a primary color pixel is determined by the respective light source and/or color filter, and the intensity of the primary color pixel is determined by the amount of the polarization rotation of the respective LC cell. Thus, according to the above assumption, the control of intensity is separated from the chromaticity of the primary. Unfortunately, while the above assumption is reasonably accurate in the case of cathode ray tube (CRT) color displays, it is significantly inaccurate in the case of LC color displays. Nevertheless, this straightforward approach, which is inherently inaccurate, simplifies the handling of data for color images in existing LC color displays.

[006] An inherent problem of LC devices is that they do not behave as perfect polarization rotators. The polarization rotation depends on the width of the LC layer, the difference between the effective refractive indices for the two polarization modes, and the wavelength of incident light. For non-monochromatic light, the amount of polarization rotation will depend on the wavelength and, therefore, the transmission of different wavelengths in the spectra may differ significantly. Furthermore, there may be significant differences in the relative transmission of different wavelengths between the

‘bright’ state and the ‘dark’ state of the cell. Thus, changing the voltage applied to the cells affects the spectrum of the outgoing light in addition to its intensity and, therefore, the viewed colors may be significantly distorted. This inaccuracy is not desirable in any color display, but may be particularly significant in color display applications that require enhanced accuracy in viewing colors, such as print-proofing or high-end display applications.

#### Summary of Embodiments of the Invention

[007] According to exemplary embodiments of the invention, RGB data provided to a pixel of a display, e.g., a LCD based display, may be corrected or adjusted so that the color of the displayed pixel would be similar to the color produced with the same RGB input data on a reference display. In this context, the reference display may be defined as a display with the property that the chromaticity values of primary color pixel components, and thus the colors of pixels, are independent of the intensity of the primary color pixel components, which determine the intensity of the pixels.

[008] According to embodiments of the invention, a method of selective color display adjustment may include adjusting an intensity value of a first primary color component of a pixel based, at least in part, on an intensity value of a second primary color component of the pixel, as described in detail below.

[009] According to embodiments of the invention the method may also include performing the adjusting for a plurality of pixels of a color image to be displayed by the color display.

[0010] According to embodiments of the invention, the method may include calculating an adjusted intensity value for the first primary color component using a conversion operator dependent on one or more of the intensity values of the primary color components.

[0011] According to some exemplary embodiment of the invention, the method may include determining an initial conversion operator, and converting the intensity values of the primary color components into initial converted intensity values using the initial conversion operator. The method may also include adjusting the conversion operator based on the converted values to

provide an adjusted conversion operator, and converting the intensity values of the primary components using the adjusted conversion to provide adjusted converted intensity values. The method may further include comparing between the initial converted intensity values and the adjusted converted intensity values, re-initializing the conversion operator according to the adjusted conversion operator, and repeating the adjusting, the converting based on the adjusted conversion operator, and the re-initializing, until a predefined difference between the initial converted intensity values and the adjusted converted intensity values is achieved.

[0012] According to other exemplary embodiments of the invention, the method may include obtaining one or more device-dependent intensity values corresponding to one or more imaginary intensity values of the primary color components, and combining one or more of the device dependent intensity values. The obtaining of one or more device-dependent values may include using one or more look-up tables to associate each of the one or more imaginary intensity values with a respective plurality of the device-dependent values.

[0013] According to other exemplary embodiments of the invention, the method may include adding a sub-adjustment value to a first imaginary intensity value based on a second imaginary intensity value, wherein the first and second imaginary intensity values correspond to the first and second primary color components, respectively.

[0014] According to embodiments of the invention there is provided a display system including a color adjustment unit to selectively adjust an intensity value of a first primary color component of a pixel based, at least in part, on an intensity value of a second primary color component of the pixel. The system may also include a driver to receive the adjusted intensity value from the color adjustment unit and to drive a color display device according to the adjusted intensity value.

[0015] According to some exemplary embodiments, the color adjustment unit may include a logic unit to obtain one or more device-dependent intensity values corresponding to one or more imaginary intensity values of the primary

color components, and to combine one or more of the device dependent intensity values.

5 [0016] According to other exemplary embodiments, the color adjustment unit may include a logic unit to add a sub-adjustment value to a first imaginary intensity value based on a second imaginary intensity value, wherein the first and second imaginary intensity values correspond to the first and second primary color components, respectively.

Brief Description of the Drawings

[0017] The invention may be understood and appreciated more fully from the following description of embodiments of the invention read in conjunction with the accompanying drawing, in which:

5 [0018] Fig. 1 is a schematic flow chart illustration of an iterative method of selective color display adjustment in accordance with exemplary embodiments of the invention;

[0019] Fig. 2 is a schematic chromaticity diagram, showing a color gamut that may be used to define imaginary primary colors in accordance with exemplary embodiments of the invention;

10 [0020] Fig. 3 is a schematic flow chart illustration of a non-iterative method of selective color display adjustment in accordance with exemplary embodiments of the invention;

[0021] Fig. 4 is a schematic flow chart illustration of a method of selective color adjustment for a more than three primary color display, in accordance with exemplary embodiments of the invention; and

15 [0022] Fig. 5 is a schematic block diagram illustration of a system of selective color display adjustment in accordance with exemplary embodiments of the invention.

20



Detailed Description of Embodiments of the Invention

[0023] According to exemplary embodiments of the invention, the RGB data provided to a pixel of a display, e.g., a LCD based display, may be corrected or adjusted so that the color of the displayed pixel would be similar to the color produced with the same RGB input data on a reference display. In this context, the reference display may be defined as a display with the property that the chromaticity values of primary color pixel components, and thus the colors of pixels, are independent of the intensity of the primary color pixel components, which determines the intensity of the pixels.

[0024] According to embodiments of the invention, a method of selective color display adjustment may include adjusting an intensity value of a first primary color component of a pixel based, at least in part, on an intensity value of a second primary color component of the pixel, as described in detail below.

[0025] A color of a given pixel of a reference display may be calculated by applying elements of a matrix of primary color components to a linearized input of the pixel. To produce a linearized input, three-primary input data, e.g., RGB data, may be converted into a signal representing linear intensity levels of the primary color components, whereby the color of the pixel may be determined in absolute terms, e.g., using a three dimensional coordinate system, for example, XYZ coordinates. Thus, the color of a pixel may be defined in terms of a weighted sum of the XYZ coordinates, wherein the relative weights of different primaries are determined by their respective linear intensity values. In mathematical terms, an XYZ color vector may be obtained, for example, by multiplying an input RGB vector (also referred to as "RGB triad") by an appropriate matrix, as follows:

$$\begin{pmatrix} X_C \\ Y_C \\ Z_C \end{pmatrix} = \begin{pmatrix} X_R & X_G & X_B \\ Y_R & Y_G & Y_B \\ Z_R & Z_G & Z_B \end{pmatrix} \cdot \begin{pmatrix} R \\ G \\ B \end{pmatrix} \quad (1)$$

[0026] In Equation 1, the subscript "c" indicates the color corresponding to the input RGB triad, and the subscripts "R", "G" and "B" represent the corresponding display primaries in this example. Thus, the conversion matrix

from RGB to XYZ may be based on the XYZ values of the display primaries. This matrix is referred to herein as the "direct conversion matrix". It should be noted that the triad ( $X_C$ ,  $Y_C$ ,  $Z_C$ ) represents the colorimetric value of the color of the pixel as it appears on a reference display characterized by the direct conversion matrix, for linearized RGB signals. It will be appreciated by those skilled in the art that according to embodiments of the invention, Equation 1 may be implemented in various forms, for example, in the direct conversion matrix form, to transform any first color data format, e.g., RGB data, into any second color data format, e.g., XYZ data. For example, the second color format may be based on any RGB space including pre-defined luminance-independent red, green and blue primary components.

[0027] Some applications may require conversion of the second color data format, e.g., the XYZ data or data in any other pre-defined absolute color coordinates, back into corresponding values in the first color data format, e.g., the RGB data format or any other device-dependent primary color data format. In general, such conversion may be required when it is desired to more accurately control the color appearing on the display, namely, to control the values of a vector ( $X_C$ ,  $Y_C$ ,  $Z_C$ ), e.g., in applications that cannot rely on the accuracy of the device-dependent colors produced in response to the original RGB data. Examples of display systems that require enhanced accuracy may include display systems used in color print proofing applications, or LC display systems designed to emulate the color accuracy of CRT display systems. In such cases, the XYZ data may be based on a model of the behavior of the print or the CRT monitor, and conversion into RGB values or into other desired primary-color formats may be required in order to obtain the required XYZ response by the LC display. Alternatively, such a conversion may be done to avoid color shifts in the presentation of video image that may affect the quality of the presented image.

[0028] It will be appreciated by those skilled in the art that according to embodiments of the invention, the RGB data format may be used for representing the absolute color space as well as for representing adjusted color coordinates. For example, RGB input data may be converted into an absolute color space including "pure" primary color components, whose chromaticity

values do not depend on the intensity values of the components. An adjustment may be applied to the intensity values of the RGB data in the absolute color space such that when the adjusted values undergo a color shift by the display, the resulting color would be the one calculated for the absolute space. It will be noted, that although the absolute color space may be represented in terms of the RGB color space, e.g., as described above, in the following description the absolute color space will be referred to as the XYZ color space.

[0029] According to exemplary embodiments of the invention, the conversion from the XYZ values back into the RGB values may be performed by matrix multiplication. For example, an inverted primary-color matrix may be used, as follows:

$$\begin{pmatrix} R \\ G \\ B \end{pmatrix} = \begin{pmatrix} X_R & X_G & X_B \\ Y_R & Y_G & Y_B \\ Z_R & Z_G & Z_B \end{pmatrix}^{-1} \cdot \begin{pmatrix} X_C \\ Y_C \\ Z_C \end{pmatrix} \quad (2)$$

[0030] The inverted conversion matrix in Equation 2, hereinafter referred to as the "inverse conversion matrix", may be obtained by inverting the direct conversion matrix.

[0031] The conversion in Equation 2 assumes that the chromaticity of the display primaries is fixed, e.g., as in a CRT display, and that the change in the relative intensity of the primary does not influence the displayed chromaticity. However, as discussed above, this is not the case for LC displays, wherein the chromaticity of the primaries may vary significantly with intensity. Thus, the use of a fixed inverse conversion matrix to convert from XYZ values into RGB values would result in distortion of the colors displayed by the LC display.

[0032] According to embodiments of the invention, this problem may be solved by using an inverse conversion matrix including elements, which are dependent on the intensity values of the primary color components. This may be achieved, for example, by mapping the XYZ values of each of the primary colors as a function of its intensity, as described below.

[0033] According to embodiments of the invention, the intensity value of each primary color may be scaled to a value in the range of 0-1, wherein a value of 1 indicates maximum intensity for that primary and a value of 0 indicates

minimum intensity. Using the maximum value as a reference, the intensity may be reduced by changing the input data to values smaller than 1. For example, the coordinate  $R$  in the one-dimensional "red" space may be mapped to a vector  $\underline{R}$  in the three dimensional XYZ space, using a function  $\underline{R}(R)$ . Analogous mapping may be used for all the primary colors, e.g., to produce red and blue vectors,  $\underline{G}$  and  $\underline{B}$ , respectively.

[0034] According to exemplary embodiments of the invention, when the chromaticity of the primary is fixed with respect to the intensity, the following mapping may be used:

$$\begin{aligned} \underline{R} &= R \cdot \underline{r}, \text{ wherein } \underline{r} = (X_R, Y_R, Z_R) \text{ is a fixed vector;} & (3) \\ \underline{G} &= G \cdot \underline{g}, \text{ wherein } \underline{g} = (X_G, Y_G, Z_G) \text{ is a fixed vector; and} \\ \underline{B} &= B \cdot \underline{b}, \text{ wherein } \underline{b} = (X_B, Y_B, Z_B) \text{ is a fixed vector.} \end{aligned}$$

[0035] When the chromaticity of the primary is not fixed with respect to the intensity, the following mapping may be used:

$$\begin{aligned} \underline{R} &= R \cdot \underline{r}(R), \text{ wherein } \underline{r} \text{ is a function of the coordinate } R & (4) \\ \underline{G} &= G \cdot \underline{g}(G), \text{ wherein } \underline{g} \text{ is a function of the coordinate } G \\ \underline{B} &= B \cdot \underline{b}(B), \text{ wherein } \underline{b} \text{ is a function of the coordinate } B \end{aligned}$$

[0036] According to some exemplary embodiments of the invention, for each primary, the corresponding vector function in Equation 4 may be replaced by a set of three look-up-tables (LUT's) including normalized X, Y and Z values of that primary as a function of the intensity of the primary, e.g., the function  $\underline{r}(R)$  may be pre-sampled to map a plurality of discrete  $R$  values into corresponding normalized vectors, the function  $\underline{g}(G)$  may be pre-sampled to map a plurality of discrete  $G$  values into corresponding normalized vectors, and the function  $\underline{b}(B)$  may be pre-sampled to map a plurality of discrete  $B$  values into corresponding normalized vectors. Given the three functions  $\underline{r}(R)$ ,  $\underline{g}(G)$  and  $\underline{b}(B)$ , selective color adjustment in accordance with embodiments of the invention may be applied as described below.

[0037] Reference is now made to Fig. 1, which schematically illustrates an iterative method of selective color display adjustment in accordance with exemplary embodiments of the invention.

[0038] As indicated at block 102, the method may include determining an initial conversion operator corresponding to a conversion of XYZ values, i.e., intensity values of the primary color components into initial converted RGB values.

5 [0039] According to exemplary embodiments of the invention, determining the initial conversion operator may include selecting one or more intensity values. For example, when an input  $XYZ_C$  enters the system, predetermined values of XYZ for each primary color, e.g., the brightest level values for  $\underline{r}(R=1)$ ,  $\underline{g}(G=1)$  and  $\underline{b}(B=1)$ , may be used to create a direct  
10 conversion matrix similar to the direct matrix of Equation 1. The direct matrix may then be inverted to obtain the conversion operator, which may include an inverse conversion matrix similar to the inverse conversion matrix of Equation 2.

[0040] As indicated at block 104, the method may also include converting the XYZ values into the initial converted intensity values, using the  
15 initial conversion operator, i.e., using the inverse conversion matrix.

[0041] As indicated at block 106, the conversion operator may be adjusted based on the converted values, i.e., the RGB values. This may be achieved, for example, by using the RGB values as inputs for the primary color functions  $\underline{r}(R)$ ,  $\underline{g}(G)$  and  $\underline{b}(B)$ , so that adjusted XYZ values for each of the  
20 primaries are obtained, as indicated at block 108. According to some exemplary embodiments a set of LUTs may be used, each LUT may include the adjusted XYZ values corresponding to one of the primaries. The adjusted XYZ values may be used to create an adjusted direct conversion matrix, as indicated at block 109. An adjusted inverse conversion matrix may be constructed by inverting the  
25 adjusted direct conversion matrix, as indicated at block 110.

[0042] As indicated at block 111, the input XYZ values may be converted using the adjusted conversion operator to provide adjusted converted intensity values. For example, the adjusted conversion operator, i.e., the adjusted  
inverse conversion matrix, may be multiplied by the input data, e.g., according to  
30 Equation 2, to obtain an adjusted set of RGB values.

[0043] As indicated at block 112, the method may also include comparing between the initial converted intensity values and the adjusted converted intensity values.

[0044] As indicated at block 114, the conversion operator may be re-initialized. For example, the conversion operator may be re-initialized according to the values of the adjusted conversion operator. This may be achieved, for example, by substituting elements of the initial conversion operator with respective values of the adjusted conversion operator.

[0045] As shown in Fig. 1, according to exemplary embodiments of the invention, the above process, may be repeated, iteratively, until the difference between consecutive iterations is sufficiently small, i.e., until a pre-determined difference between the initial converted intensity values and the adjusted converted initial values is achieved. However, it should be appreciated that in many cases a single iteration may be sufficient to reach the desired color accuracy. Furthermore, since neighboring pixels of an image are typically similar, except in border regions that cover only a small area of the image, there is generally no need to start the process with the brightest level matrix for each pixel; instead, the starting point for correcting the color of each pixel may be based on the last matrix obtained for the previous pixel, i.e., the initial intensity values may be selected according to intensity values of primary color components of a neighboring pixel. This may result in a significantly more efficient iterative process, i.e., a smaller number of iterations may be required to determine the correct color of at least some of the pixels.

[0046] It is appreciated that, in certain applications, the iterative process described above may not be sufficiently efficient. For example, the accuracy that may be obtained by such an iterative process may be limited due to the speed required by motion video applications. Therefore, an aspect of the present invention avoids such iterative procedure, as described below.

[0047] As discussed above, the chromaticity of the primary colors may vary with their intensity, namely, each primary color may be represented by a curve on a chromaticity plane, such as the chromaticity diagram depicted in Fig. 2.

[0048] The dashed triangular area in Fig. 2 represents the color gamut that may be obtained from combinations of three primary colors at an intensity level that results in the widest possible gamut that is fully contained by the color gamut obtained from the same primary colors at any other intensity level. The corners of the triangular area, as defined above, define three chromaticity value points, which are referred to herein as "imaginary primary colors". It will be appreciated by persons skilled in the art that such imaginary primary colors may be pre-defined based on device-dependent color-shift parameters.

[0049] For a given intensity level of each imaginary primary, as defined above, it is possible to calculate the RGB values that would yield a correct chromaticity. For example, in case of the imaginary "red" primary, a function  $\underline{r}^*(R^*)$  defining a vector in the RGB space may be used, wherein  $R^*$  denotes the intensity of the imaginary "red" primary and  $\underline{r}^*$  is a three-component vector of RGB values, the combination of which would yield a color with the chromaticity of the required imaginary red primary at a normalized intensity  $R^*$ . In this example, the chromaticity of the imaginary "red" primary is fixed, and  $R^*$  is in the range of 0 – 1, wherein 1 represents the maximum intensity of the imaginary red primary. It should be noted that a fixed vector  $\underline{r}^*=(R, G, B)$ , in which the value of R is close to 1 and the values B and G represents small corrections, may be suitable for many types of display devices. It should be appreciated that the imaginary B and G primary colors may be defined by functions analogous to those used to define the imaginary R primary.

[0050] In some embodiments of the invention, the vector functions may be obtained using an iterative method, e.g., as described above with reference to Fig. 1; however other methods may also be suitable. For each imaginary primary, the RGB values of the vector functions may be stored in look-up-tables (LUTs), for example, three LUTs representing R, G and B, respectively, as described above.

[0051] Reference is now made to Fig. 3, which schematically illustrates a flow chart of a non-iterative method of selective color display adjustment, in accordance with exemplary embodiments of the invention.

[0052] As shown in Fig. 3, the received  $XYZ_C$  data signal or any other RGB data with absolute reference primaries, as described above, may be represented in terms of the set of imaginary primary colors.

5 [0053] As indicated at block 302, according to some exemplary embodiments of the invention, a conversion operator, e.g., an inverse matrix similar to the inverse matrix of Equation 2, may be applied to the input intensity values of the primary components to obtain the corresponding imaginary intensity values. Since the chromaticity of each imaginary primary color, e.g. the chromaticity of each imaginary primary color in the chromaticity diagram of Fig.  
10 2, is independent of intensity, the inverse matrix format of Equation 2 above may be used to obtain the relative intensities of the imaginary primaries in a straightforward manner, namely from the input data the values  $R^*$ ,  $G^*$  and  $B^*$  may be calculated.

[0054] According to other exemplary embodiments of the invention, if  
15 the absolute color is represented in terms of RGB space with a pre-defined set of fixed primaries, it may be useful to set the imaginary primaries to the values of the reference primaries. Thus, according to these embodiments, conversion of the input data into corresponding imaginary primary intensities, e.g., as indicated by block 302, may not be required.

20 [0055] As indicated at block 304, the method may include obtaining device-dependent intensity values corresponding to the imaginary intensity values, e.g., the relative intensities  $R^*$ ,  $G^*$ ,  $B^*$  may be used to obtain the corresponding RGB values for each imaginary primary at the correct intensity level for that imaginary primary. For example a set of LUTs, each including a set  
25 of device-dependent intensity values corresponding to one of the imaginary intensity values, may be used. For example, a LUT corresponding to values of  $R^*$  may include sets of device dependent intensity values  $R(R^*)$ ,  $G(R^*)$ , and  $B(R^*)$  such that a red imaginary primary at an intensity level  $R^*$  may be produced by the display device as a combination of  $R(R^*)$ ,  $G(R^*)$ , and  $B(R^*)$ .  
30 Accordingly, a LUT corresponding to values of  $G^*$  may include sets of device dependent values  $R(G^*)$ ,  $G(G^*)$ , and  $B(G^*)$ , and a LUT corresponding to values of  $B^*$  may include sets of device dependent values  $R(B^*)$ ,  $G(B^*)$ , and  $B(B^*)$ .



According to some exemplary embodiments, the device-dependent values of the LUTs may be calculated off-line using the iterative method described above with reference to Fig. 1.

5 [0056] As indicated at block 306, the method may also include combining the device-dependent values, e.g., based on the primary color components. Combining the device-dependent values may include calculating a sum of the device-dependent values corresponding to each of the imaginary primaries. For example, in order to create the required  $R^*$  value of the imaginary red primary, the corresponding combination, e.g., the sum, of the R, G and B  
10 signal values found in the  $R^*$  LUT may be sent to the display. The same applies for the green and the blue imaginary primaries. Accordingly, the "R" signal sent to the display may be determined based on the sum of the R signals for the different imaginary primaries. Similarly, the B and G signals sent to the display may be determined based on the some of the different G and B signal  
15 components.

[0057] Since the display system may not be linear, the summation over the R, G and B signals, as described above, may cause a slight shift in the chromaticity of the actual primary colors reproduced by the display. However, it  
20 will be appreciated by persons skilled in the art that this shift would be negligible because, for example, the relative contribution of the imaginary G and B components in determining the R signal are typically small and do not significantly affect the over-all intensity of the primary. Similarly, the intensity levels of G and B are not significantly influenced by the additional, smaller, components contributing to their chromaticity correction.

25 [0058] Although the above methods are described in the context of three-primary color display systems, it will be appreciated by those skilled in the art that these methods are equally suitable for displays using four or more primary colors. For example, in a more-than-three-primary system, the color shift of each primary as a function of its intensity may be recorded as described above.  
30 Additionally, more than three imaginary primary colors may be defined by the corners of a more-than-three-sided shape of the gamut resulting from combinations of the real primaries at a certain intensity level, in analogy to the

triangular gamut described above with reference to Fig. 2. Each such imaginary primary may have a fixed chromaticity, as described above, and thus the conversion of input colors to imaginary primaries may be readily determined using calculations analogous to those demonstrated above and/or as described in prior art publications relating to more-than-three primary displays. As described above, for each imaginary primary, off-line calculation may be used to determine the combination of device-dependent primaries that may provide a pre-defined set of intensity values of the imaginary primary. Similarly, as in the three-primary system, for each color input, the combination of imaginary primaries that yields that color may be calculated by analogous methods. Thus, the value of each imaginary primary at a given intensity level may be replaced by the pre-calculated set of device-dependent primaries that reproduce the imaginary primary at the correct intensity level and chromaticity.

[0059] In the above description, each of the imaginary primaries is described in terms of combinations of all primaries to yield the chromaticity of the imaginary primary at different intensity levels. In practice, according to some exemplary embodiments of the invention, the calculations described above may be simplified for a more-than three primary color display. In a more than three primaries display, the red, green and blue primaries may have a narrow spectral range and thus their color shift with intensity may be relatively small. Additional primaries, e.g., cyan and yellow, may have a relatively wide spectral range and thus may suffer from large color shifts. Thus, according to some embodiments of the invention, it may be required to adjust intensity values corresponding to only some of the primary components. Furthermore, in many cases the selective color adjustment may be achieved by adding only one primary to the adjusted primary component, as described below.

[0060] According to some exemplary embodiment, a shift in the yellow primary may tend to be mostly on the red-green axis. If the imaginary yellow primary were chosen to be on the red edge of the yellow color shift, then when the intensity is changed the yellow primary would "drift" towards the green primary. In order to adjust such a drift, the intensity of the red primary may be increased, and at the same time an intensity value of the yellow primary may be

reduced, in order to keep the displayed intensity at the required level. Thus, a fixed chromaticity yellow imaginary primary may be created by a combination of only two primaries, e.g., red and yellow. However, it will be appreciated by those skilled in the art that the adjustment may be analogously achieved by a combination of green and yellow if the imaginary primary is chosen to be on the green side of the yellow color shift. In a similar manner, a color shift of the cyan primary may be adjusted by one primary, e.g., green or blue. It will be appreciated by those skilled in the art that in other embodiments of the invention, the use of three, i.e. a selected primary to be adjusted and two primaries on both sides of the selected primary, may be required to adjust the color shift of the selected primary.

[0061] Thus, according to some embodiments of the invention, the non-iterative method for selective color adjustment, e.g., as described with reference to Fig. 3, may be simplified, as described below.

[0062] Reference is made to Fig. 4, which schematically illustrates a flow chart of a method of selective color adjustment for a more than three primary color display, in accordance with exemplary embodiments of the invention.

[0063] The following description may refer, for simplicity, to two categories of primary components, namely, major-shifted primary components and minor-shifted primary component. A major-shifted primary color may correspond to a primary component, e.g., yellow, which may have a relatively large color shift. A minor-shifted primary component may correspond to a primary component, e.g., red, which may be adjusted based on an adjustment of a major-shifted primary component. However, it will be appreciated by those skilled in the art that this categorization is for simplicity only, and that according to other embodiments of the invention the primary components may be categorized differently.

[0064] As indicated at block 402, the method may include receiving the imaginary primary values. The imaginary primary values may include at least one major-shifted imaginary primary component and at least one minor-shifted imaginary primary component.

[0065] As indicated at block 404, an adjusted major-shifted primary component value may be obtained based on the major-shifted imaginary primary component value. This may be achieved, for example, using a LUT including values of the adjusted major-shifted primary component corresponding to the values of the imaginary major-shifted primary component, e.g., as described above.

[0066] As indicated at block 406, for one or more minor-shifted imaginary primary colors, e.g., a red imaginary primary value, a sub-adjustment may be performed, for example, using a LUT including sub-adjustment values for the minor-shifted imaginary primary color, e.g., red, corresponding to the values of the major-shifted imaginary primary color, e.g. yellow, as described above.

[0067] As indicated at block 408, the sub-adjustment value may be added, for example, to the value of the imaginary minor-shifted primary. Thus, a major-shifted primary color signal sent to the display may include the adjusted major-shifted primary color value, and the sub-adjustment value may be added to the imaginary minor-shifted primary value to create a minor-shifted primary signal sent to the display. It may be noted that, for simplicity of description, it is assumed that the minor-shifted primary color does not have an adjustment or correction scheme, i.e., the imaginary minor-shifted primary is similar in behavior to the "real" minor-shifted primary. It will be appreciated by persons skilled in the art that an adjustment scheme according to embodiments of the invention may also be applied to minor-shifted primary colors. In particular, a self-correction LUT on the value of the minor-shifted primary may be implemented.

[0068] Although the raw color inputs used by embodiments of the invention have been described above in terms of XYZ data, it should be appreciated that any other device-independent color representation may be used in conjunction with the present invention. Furthermore, device-dependent color representation, such as RGB or YCbCr, or any other suitable formats, may be appropriately defined as "device-independent" colors, in the context of absolute color coordinates, such as the color coordinates of CRT phosphors. Therefore,

the use of XYZ in describing the exemplary embodiments above should in no be interpreted to limit the scope of the present invention.

[0069] Reference is made to Fig. 5, which schematically illustrates a block diagram of a system 500 of selective color display adjustment in accordance with exemplary embodiments.

[0070] According to exemplary embodiments of the invention, system 500 may implement principles of embodiments of the selective color adjustment methods described above.

[0071] According to embodiments of the invention, system 500 may include a color adjustment unit 501 to selectively adjust an intensity value of a first primary color component of a pixel based, at least in part, on an intensity value of a second primary color component of the pixel. Unit 501 may include a logic unit 505 to receive unadjusted input data, and to produce an adjusted signal, e.g., a signal representing adjusted RGB color values, or adjusted color values in any other format of three or more primary colors, as discussed above, suitable for driving a color display device 503. The adjusted signal may be received by a driver 502, which drives the display device 503. Logic unit 505 may execute algorithms corresponding to any of the selective color adjustment methods described above. At least part of the function of logic unit 505 may be implemented by any combination of software and/or hardware. For example, logic unit 505 may include a CPU, DSP, FPGA, ASIC, or any other type of logic unit known in the art. Additionally or alternatively, part of the function of unit 505 may be implemented by means of a software driver and/or as a "plug-in" to an existing software driver. According to some exemplary embodiments, logic unit 505 may include one or more memory units 507 adapted to store one or more LUTs, e.g., as described above. For example, memory unit 507 may include a Random Access Memory (RAM), as is known in the art.

[0072] The present invention may be implemented in conjunction with any color display system known in the art. Further, any type of display system or device incorporating elements of the methods, systems device described above in combination with other known elements, is also included within the scope of the present invention. Although some embodiments of the present invention may be

particularly suitable for display systems using LC devices, for example, direct-viewing displays, and sequential or simultaneous projection displays, it should be appreciated that other the invention may also be used in conjunction with any other type of display system.

5 [0073] While certain features of the invention have been illustrated and described herein, many modifications, substitutions, changes, and equivalents will now occur to those of ordinary skill in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the invention.

CLAIMS

[0074] What is claimed is:

1. A method of selectively adjusting colors displayed by a color display, the method  
5 comprising adjusting an intensity value of a first primary color component of a pixel based, at least in part, on an intensity value of a second primary color component of said pixel.
2. The method of claim 1, wherein said pixel comprises three or more primary color components.
- 10 3. The method of claim 2, wherein said adjusting comprises adjusting the intensity value of said primary color component based on intensity values of all said three primary color components.
4. The method of claim 2, wherein said three or more primary color components comprise four or more primary color components.
- 15 5. The method of claim 4, wherein said adjusting comprises adjusting the intensity value of said first primary color component based on intensity values of one or more of said four or more primary color components.
6. A method according to any of claims 1-5 comprising performing said adjusting for a plurality of pixels of a color image to be displayed by said color display.
- 20 7. The method of any of claims 1-6, wherein said adjusting comprises calculating an adjusted intensity value for said first primary color component using a conversion operator dependent on one or more of the intensity values of the primary color components.
8. The method of claim 7, wherein said conversion operator comprises a conversion  
25 inverse matrix to convert the intensity values of said primary color components in an absolute data format into corresponding values in a device-dependent data format.
9. The method of claim 8, wherein one or more elements of said conversion inverse matrix are dependent on one or more of the intensity values of said primary color components.
- 30 10. The method of claim 8, wherein said conversion inverse matrix corresponds to an inverse of a direct conversion matrix.

11. The method of claim 10, wherein said direct conversion matrix comprises elements dependent on the intensity values of said primary color components.
12. The method of any of claims 7-11, wherein said adjusting comprising:
  - determining an initial conversion operator; and
  - 5 converting the intensity values of said primary color components into initial converted intensity values using said initial conversion operator.
13. The method of claim 12, wherein determining said initial conversion operator comprises selecting one or more initial intensity values.
14. The method of claim 13 wherein said initial intensity values are selected  
10 according to intensity values of primary color components of a neighbor pixel adjacent to said pixel.
15. The method of any of claims 12-14 comprising:
  - adjusting said conversion operator based on said converted values to provide an adjusted conversion operator; and
  - 15 converting the intensity values of said primary components using said adjusted conversion to provide adjusted converted intensity values.
16. The method of claim 15, wherein adjusting said conversion operator comprises:
  - calculating elements of an adjusted direct conversion matrix based on said converted values; and
  - 20 constructing an inverse matrix by inverting said adjusted direct conversion matrix.
17. The method of claim 16 wherein said calculating comprises:
  - using one or more look up tables to associate each of said converted values with a set of device dependent XYZ values; and
  - 25 constructing said adjusted direct conversion matrix using said XYZ values.
18. The method of any of claims 15-17 comprising comparing between said initial converted intensity values and said adjusted converted intensity values.
19. The method of claim 18 comprising re-initializing said conversion operator according to said adjusted conversion operator.
- 30 20. The method of claim 19, wherein re-initializing said conversion operator comprises substituting elements of said initial conversion operator with respective values of said adjusted conversion operator.



21. The method of claim 19 or 20 comprising repeating said adjusting, said converting based on said adjusted conversion operator, and said re-initializing, until a pre-determined difference between said initial converted intensity values and said adjusted converted intensity values is achieved.
- 5 22. The method of any of claims 1-6 wherein said adjusting comprises:  
obtaining one or more device-dependent intensity values corresponding to one or more imaginary intensity values of said primary color components;  
and  
combining one or more of said device dependent intensity values.
- 10 23. The method of claim 22, wherein said imaginary intensity values comprise the intensity values of said primary color components.
24. The method of claim 22 comprising obtaining said imaginary intensity values by applying a predefined conversion operator to input intensity values of said primary color components.
- 15 25. The method of any of claims 22-24, wherein obtaining one or more device-dependent values comprises using one or more look up tables to associate each of said one or more imaginary intensity values with a respective plurality of said device-dependent values.
26. The method of any of claims 22-25, wherein each of said device dependent  
20 values correspond to one of said primary color components.
27. The method of claim 26, wherein said combining comprises combining said device-dependent values based on said primary color components.
28. The method of claim 27 wherein said combining comprises calculating a sum of the device dependent values corresponding to each of said primary color  
25 components.
29. The method of any of claims 1-6 comprising:  
adding a sub-adjustment value to a first imaginary intensity value based on a second imaginary intensity value, said first and second imaginary intensity values corresponding to said first and second primary color components,  
30 respectively.
30. The method of claim 29, wherein said imaginary intensity values comprise the intensity values of said primary color components.

31. The method of claim 29 comprising obtaining said imaginary intensity values by applying a predefined conversion operator to input intensity values of said primary color components.
32. A display system comprising:  
5       a color adjustment unit to selectively adjust an intensity value of a first primary color component of a pixel based, at least in part, on an intensity value of a second primary color component of said pixel.
33. The system of claim 32 comprising a driver to receive said adjusted intensity value from said color adjustment unit and to drive a color display device  
10       according to said adjusted intensity value.
34. The system of claim 32 or 33, wherein said color adjustment unit comprises a logic unit to obtain one or more device-dependent intensity values corresponding to one or more imaginary intensity values of said primary color components, and to combine one or more of said device dependent intensity values.
- 15   35. The system of claim 34, wherein said imaginary intensity values comprise the intensity values of said primary color components.
36. The system of claim 34, wherein said logic unit is adapted to obtain said imaginary intensity values by applying a predefined conversion operator to input intensity values of said primary color components.
- 20   37. The system of any of claims 34-36, wherein said logic unit comprises one or more memory units to store one or more look up tables to associate each of said one or more imaginary intensity values with a respective plurality of said device-dependent values.
38. The system of claim 32 or 33, wherein said color adjustment unit comprises a  
25       logic unit to add a sub-adjustment value to a first imaginary intensity value based on a second imaginary intensity value, said first and second imaginary intensity values corresponding to said first and second primary color components, respectively.
39. The system of claim 38, wherein said imaginary intensity values comprise the  
30       intensity values of said primary color components.

40. The system of claim 38, wherein said logic unit is adapted to apply a predefined conversion operator to input intensity values of said primary color components to obtain said imaginary intensity values.
41. The system of any of claims 38-40, wherein said logic unit comprises a first  
5 memory unit to store a first look up table to associate said sub-adjustment value with said second imaginary intensity value.

1/5

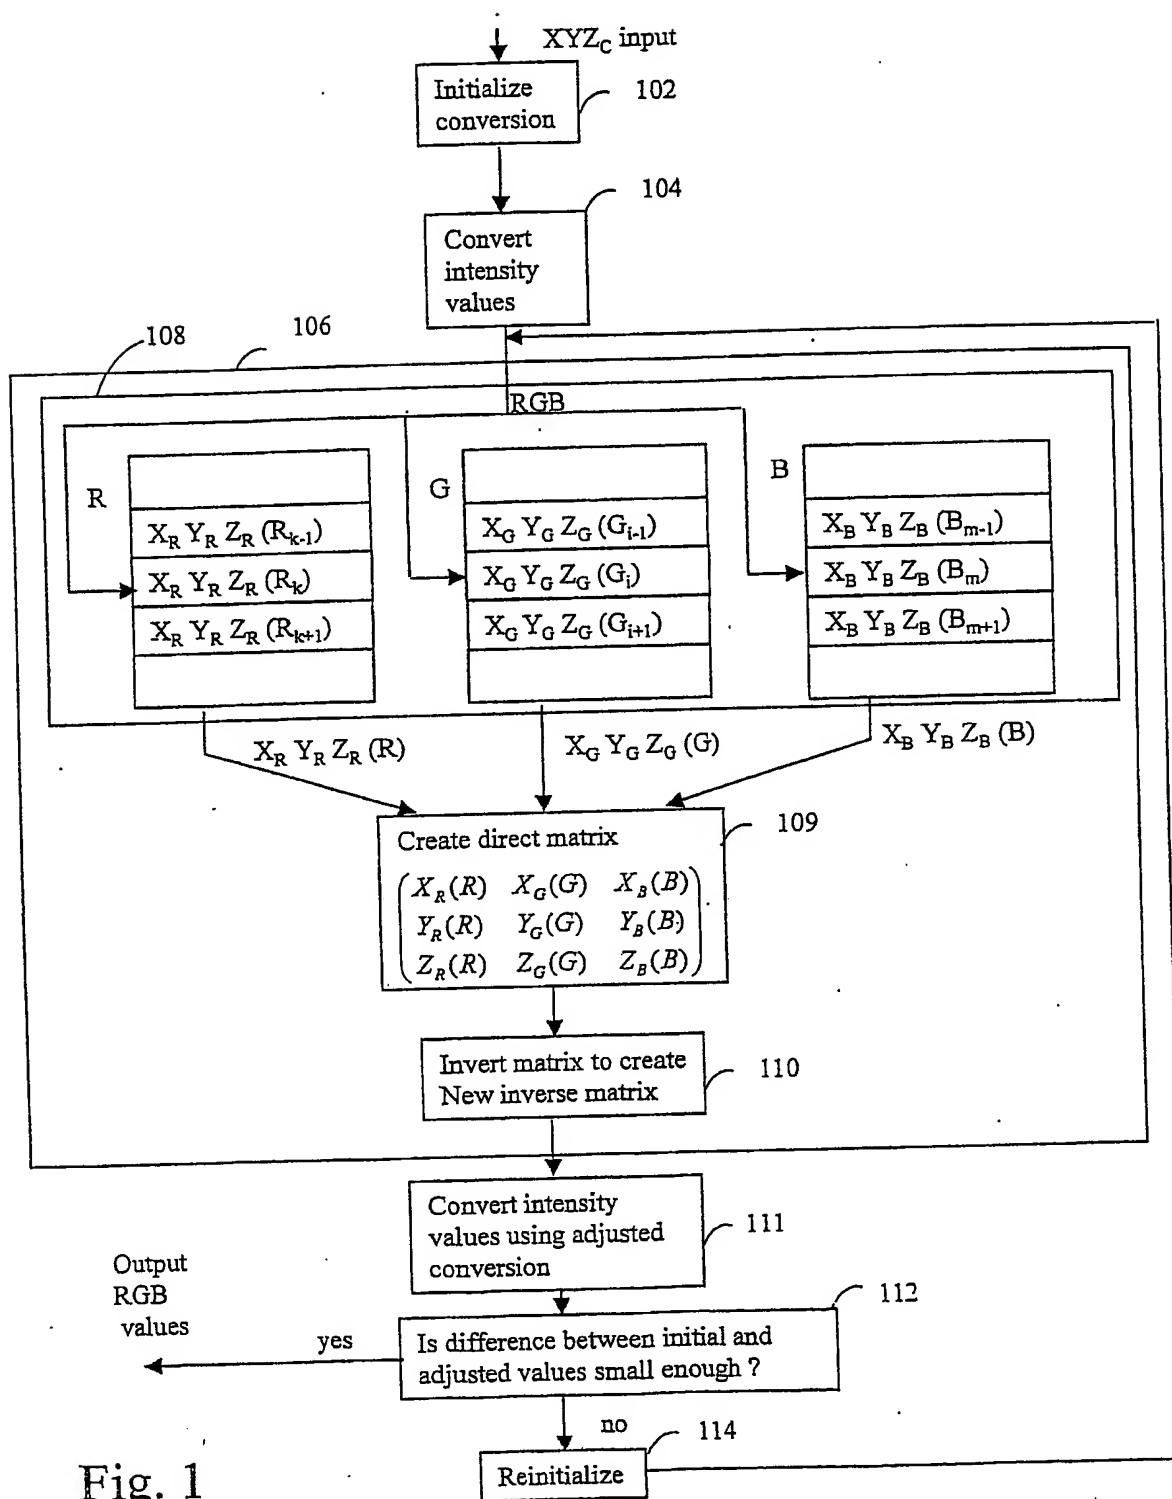


Fig. 1

2/5

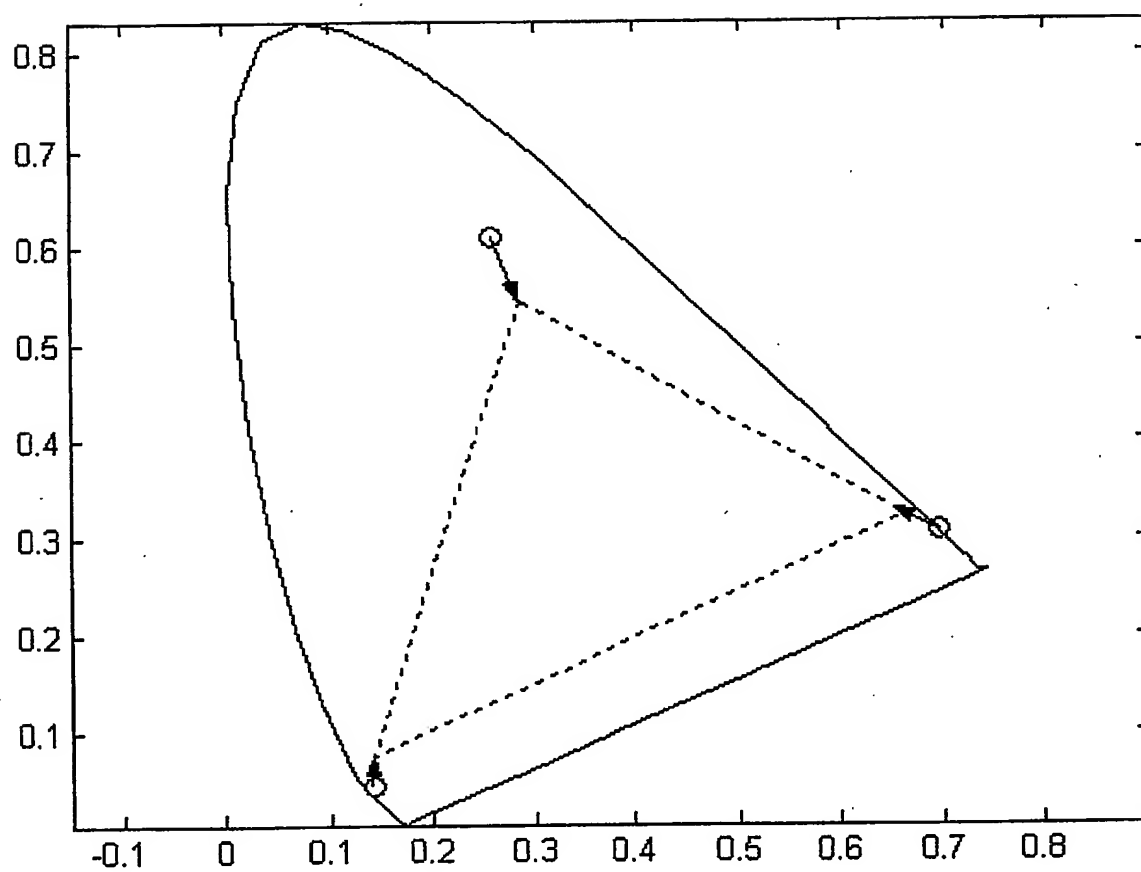


Fig. 2

3/5

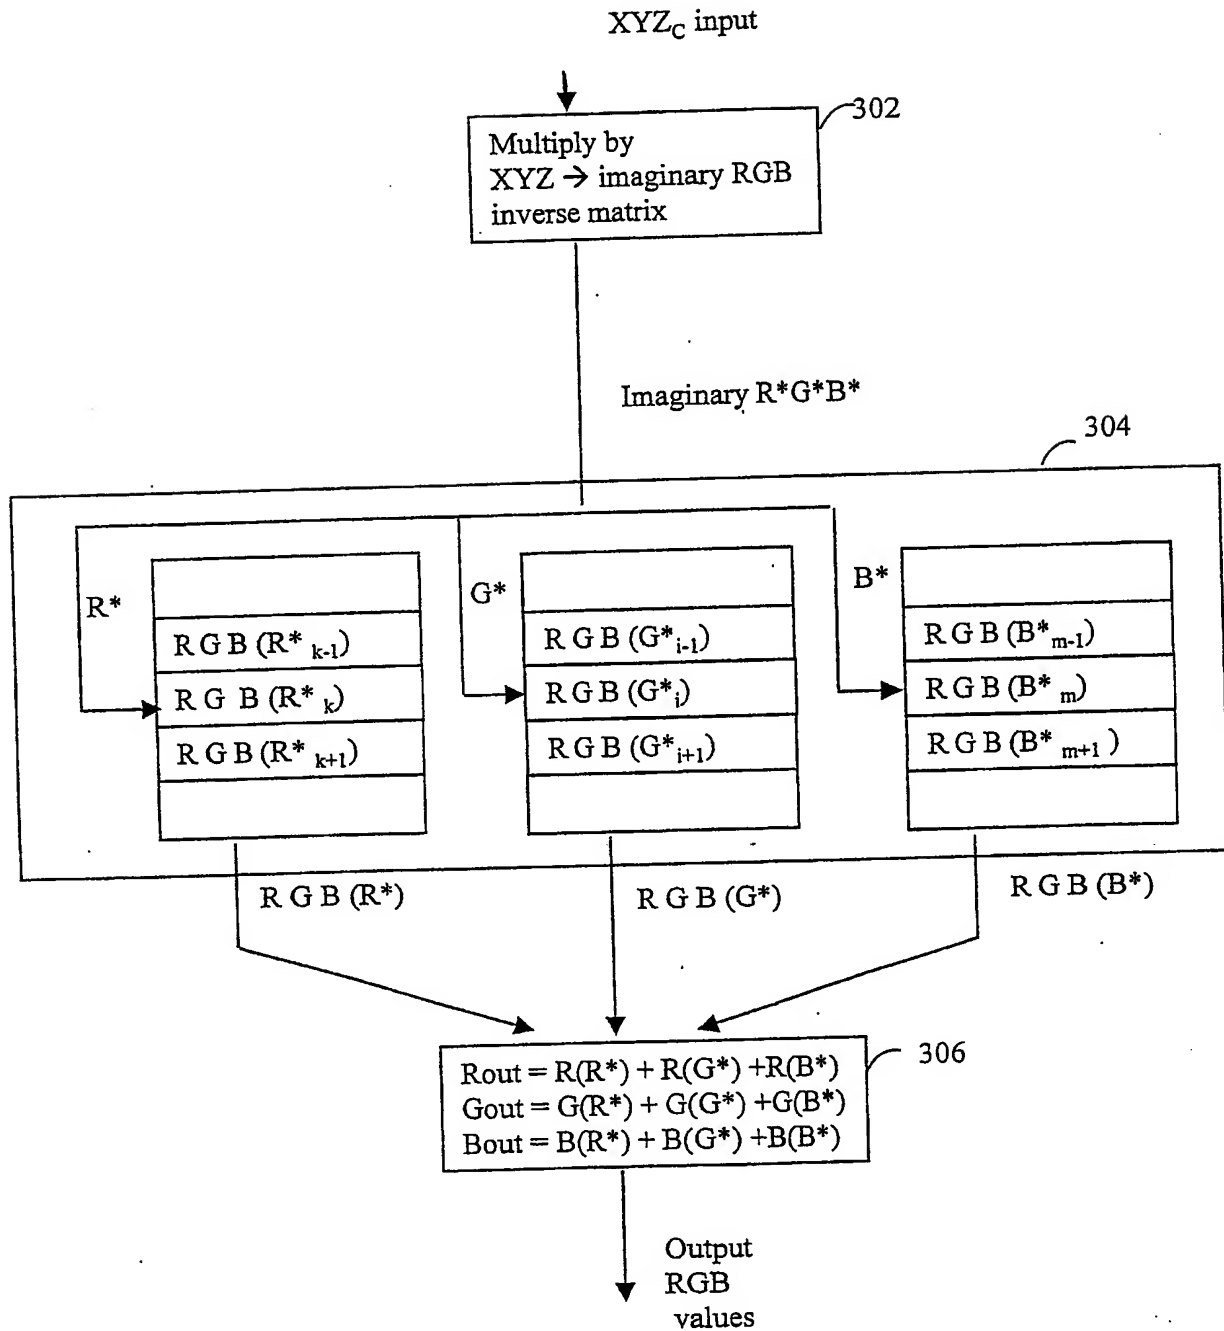


Fig. 3

4/5

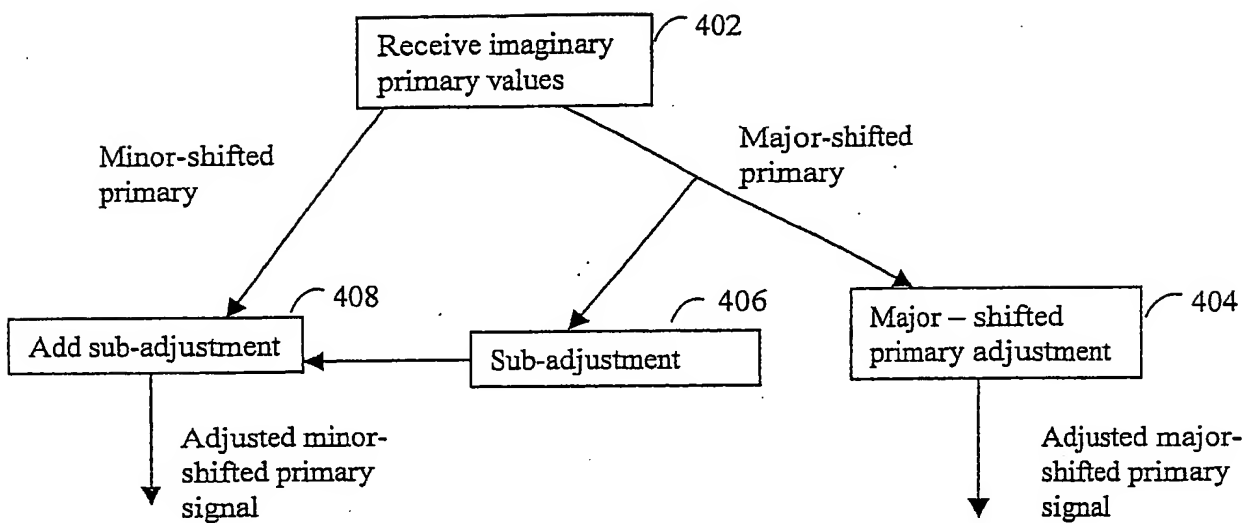


Fig. 4

5/5

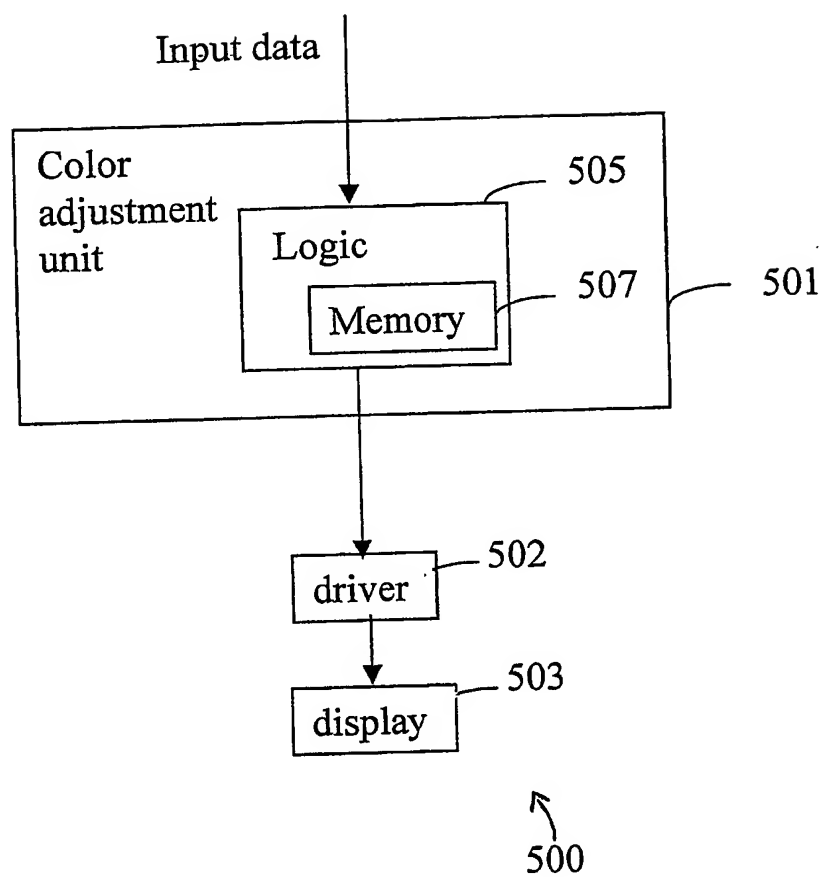


Fig. 5



# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL03/00905

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G09G 5/02

US CL : 345/589

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 345/600,603,604

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EAST

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6,072,464 A (OZEKI) 06 June 2000 (06.06.2000), column 4, line 66 to column 13, line 14. and Fig. 45	1-41
X	US 6,366,291 B1 (TANIGUCHI et al.) 02 April 2002 (02.04.2002), column 2, line 41 to column 6, line 13 and Fig. 20-22	1-41

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

24 March 2004 (24.03.2004)

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, Virginia 22313-1450

Facsimile No. (703) 305-3230

Date of mailing of the international search report

Authorized officer

Matthew C Bella

Telephone No. (703) 305-3900

09 APR 2004

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL03/00905

## Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claim Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claim Nos.:  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☒ Claim Nos.: 7-31, 37 and 41  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

## Box II Observations where unity of invention is lacking (Continuation of Item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

☐  
☐

The additional search fees were accompanied by the applicant's protest.

No protest accompanied the payment of additional search fees.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**